

Based on DDR2-667/800 64Mx16 (1GB)/128Mx8 (2GB) SDRAM D-Die

Features

• Performance:

Speed Sort	PC2-5300	PC2-6400	Unit
	-3C	-AC	
DIMM CAS Latency	5	5	
fck – Clock Frequency	333	400	MHz
tck – Clock Cycle	3	2.5	ns
Data Transfer Speed	667	800	Mbps

- 200-Pin Small Outline Dual In-Line Memory Module (SO-DIMM)
- 1GB: 128Mx64 Unbuffered DDR2 SO-DIMM based on 64Mx16 DDR2 SDRAM D Die devices
- 2GB: 256Mx64 Unbuffered DDR2 SO-DIMM based on 128Mx8 DDR2 SDRAM D Die devices
- Intended for 333MHz and 400MHz applications
- Inputs and outputs are SSTL-18 compatible
- $V_{DD} = V_{DDQ} = 1.8V \pm 0.1V$
- SDRAMs have 8 internal banks for concurrent operation
- Differential clock inputs
- Data is read or written on both clock edges
- DRAM DLL aligns DQ and DQS transitions with clock transitions
- Address and control signals are fully synchronous to positive clock edge
- Auto Refresh (CBR) and Self Refresh Modes
- Automatic and controlled precharge commands
- Programmable Operation:
 - DIMM $\overline{CAS}$ Latency: 3, 4, 5
 - Burst Type: Sequential or Interleave
 - Burst Length: 4, 8
 - Operation: Burst Read and Write
- 13/10/2 Addressing (1GB)
- 14/10/2 Addressing (2GB)
- 7.8 μs Max. Average Periodic Refresh Interval
- Serial Presence Detect
- Gold contacts
- 1GB module's SDRAMs are 84-ball BGA Package
- 2GB module's SDRAMs are 60-ball BGA Package
- RoHS compliance

Description

M2N1G64TUH8D4F, M2N2G64TU8HD4B, M2N1G64TUH8D5F, M2N2G64TU8HD5B, M2N1G64TUH8D6F and M2N2G64TU8HD6B are unbuffered 200-Pin Double Data Rate 2 (DDR2) Synchronous DRAM Small Outline Dual In-Line Memory Module (SO-DIMM), organized as two ranks of 128Mx64 (1GB)/256Mx64 (2GB) high-speed memory array. M2N1G64TUH8D4F, M2N1G64TUH8D5F and M2N1G64TUH8D6F use eight 64Mx16 84-ball BGA packaged devices and M2N2G64TU8HD4B, M2N2G64TU8HD5B and M2N2G64TU8HD6B use sixteen 128Mx8 60-ball BGA packaged devices. These DIMMs are manufactured using raw cards developed for broad industry use as reference designs. The use of these common design files minimizes electrical variation between suppliers. All Elixir DDR2 SODIMMs provide a high-performance, flexible 8-byte interface in a space-saving footprint.

The DIMM is intended for use in applications operating of 333MHz/400MHz clock speeds and achieves high-speed data transfer speed of 667Mbps/800Mbps. Prior to any access operation, the device $\overline{CAS}$ latency and burst/length/operation type must be programmed into the DIMM by address inputs A0-A12 (1GB) / A0-A13 (2GB) and I/O inputs BA0, BA1 and BA2 using the mode register set cycle.

The DIMM uses serial presence-detect implemented via a serial EEPROM using a standard IIC protocol. The first 128 bytes of SPD data are programmed and locked during module assembly. The remaining 128 bytes are available for use by the customer.

M2N1G64TUH8D4F / M2N2G64TU8HD4B / M2N1G64TUH8D5F / M2N2G64TU8HD5B

M2N1G64TUH8D6F / M2N2G64TU8HD6B

1GB: 128M x 64 / 2GB: 256M x 64

Unbuffered DDR2 SO-DIMM



Ordering Information

Part Number	Speed			Organization	Power	Leads	Note
M2N2G64TU8HD4B –AC	DDR2-800	PC2-6400	400MHz (2.50ns @ CL = 5)	256Mx64	1.8V	Gold	
M2N2G64TU8HD4B –3C	DDR2-667	PC2-5300	333MHz (3.00ns @ CL = 5)				
M2N2G64TU8HD5B –AC	DDR2-800	PC2-6400	400MHz (2.50ns @ CL = 5)				
M2N2G64TU8HD5B –3C	DDR2-667	PC2-5300	333MHz (3.00ns @ CL = 5)				
M2N2G64TU8HD6B –AC	DDR2-800	PC2-6400	400MHz (2.50ns @ CL = 5)				
M2N2G64TU8HD6B –3C	DDR2-667	PC2-5300	333MHz (3.00ns @ CL = 5)				
M2N1G64TUH8D4F –AC	DDR2-800	PC2-6400	400MHz (2.50ns @ CL = 5)	128Mx64			
M2N1G64TUH8D4F –3C	DDR2-667	PC2-5300	333MHz (3.00ns @ CL = 5)				
M2N1G64TUH8D5F –AC	DDR2-800	PC2-6400	400MHz (2.50ns @ CL = 5)				
M2N1G64TUH8D5F –3C	DDR2-667	PC2-5300	333MHz (3.00ns @ CL = 5)				
M2N1G64TUH8D6F –AC	DDR2-800	PC2-6400	400MHz (2.50ns @ CL = 5)				
M2N1G64TUH8D6F –3C	DDR2-667	PC2-5300	333MHz (3.00ns @ CL = 5)				

Pin Description

CK0, CK1, $\overline{CK0}$, $\overline{CK1}$	Differential Clock Inputs	DQ0-DQ63	Data input/output
CKE0, CKE1	Clock Enable	DQS0-DQS7	Bidirectional data strobes
$\overline{RAS}$	Row Address Strobe	$\overline{DQS0}$ - $\overline{DQS7}$	Differential data strobes
$\overline{CAS}$	Column Address Strobe	DM0-DM7	Input Data Masks
WE	Write Enable	V _{DD}	Power (1.8V)
$\overline{CS0}$, $\overline{CS1}$	Chip Selects	V _{REF}	Ref. Voltage for SSTL_18 inputs
A0-A9 A11-A13	Row Address Inputs	V _{DDSPD}	Serial EEPROM positive power supply
A0-A9	Column Address Inputs	V _{SS}	Ground
A10/AP	Column Address Input/Auto-precharge	SCL	Serial Presence Detect Clock Input
BA0, BA1, BA2	SDRAM Bank Address Inputs	SDA	Serial Presence Detect Data input/output
ODT0, ODT1	Active termination control lines	SA0, SA1	Serial Presence Detect Address Inputs
NC	No Connect		

Note: A13 is only support in 2GB module type.

1GB/2GB DDR2 SDRAM SODIMM Pinout

Pin	Front	Pin	Back	Pin	Front	Pin	Back	Pin	Front	Pin	Back	Pin	Front	Pin	Back
1	V _{REF}	2	V _{SS}	51	DQS2	52	DM2	101	A1	102	A0	151	DQ42	152	DQ46
3	V _{SS}	4	DQ4	53	V _{SS}	54	V _{SS}	103	V _{DD}	104	V _{DD}	153	DQ43	154	DQ47
5	DQ0	6	DQ5	55	DQ18	56	DQ22	105	A10/AP	106	BA1	155	V _{SS}	156	V _{SS}
7	DQ1	8	V _{SS}	57	DQ19	58	DQ23	107	BA0	108	$\overline{RAS}$	157	DQ48	158	DQ52
9	V _{SS}	10	DM0	59	V _{SS}	60	V _{SS}	109	$\overline{WE}$	110	$\overline{CS0}$	159	DQ49	160	DQ53
11	$\overline{DQS0}$	12	V _{SS}	61	DQ24	62	DQ28	111	V _{DD}	112	V _{DD}	161	V _{SS}	162	V _{SS}
13	DQS0	14	DQ6	63	DQ25	64	DQ29	113	$\overline{CAS}$	114	ODT0	163	NC	164	CK1
15	V _{SS}	16	DQ7	65	V _{SS}	66	V _{SS}	115	$\overline{CS1}$	116	A13/NC	165	V _{SS}	166	$\overline{CK1}$
17	DQ2	18	V _{SS}	67	DM3	68	$\overline{DQS3}$	117	V _{DD}	118	V _{DD}	167	$\overline{DQS6}$	168	V _{SS}
19	DQ3	20	DQ12	69	NC	70	DQS3	119	ODT1	120	NC	169	DQS6	170	DM6
21	V _{SS}	22	DQ13	71	V _{SS}	72	V _{SS}	121	V _{SS}	122	V _{SS}	171	V _{SS}	172	V _{SS}
23	DQ8	24	V _{SS}	73	DQ26	74	DQ30	123	DQ32	124	DQ36	173	DQ50	174	DQ54
25	DQ9	26	DM1	75	DQ27	76	DQ31	125	DQ33	126	DQ37	175	DQ51	176	DQ55
27	V _{SS}	28	V _{SS}	77	V _{SS}	78	V _{SS}	127	V _{SS}	128	V _{SS}	177	V _{SS}	178	V _{SS}
29	$\overline{DQS1}$	30	CK0	79	CKE0	80	CKE1	129	$\overline{DQS4}$	130	DM4	179	DQ56	180	DQ60
31	DQS1	32	$\overline{CK0}$	81	V _{DD}	82	V _{DD}	131	DQS4	132	V _{SS}	181	DQ57	182	DQ61
33	V _{SS}	34	V _{SS}	83	NC	84	NC	133	V _{SS}	134	DQ38	183	V _{SS}	184	V _{SS}
35	DQ10	36	DQ14	85	BA2	86	NC	135	DQ34	136	DQ39	185	DM7	186	$\overline{DQS7}$
37	DQ11	38	DQ15	87	V _{DD}	88	V _{DD}	137	DQ35	138	V _{SS}	187	V _{SS}	188	DQS7
39	V _{SS}	40	V _{SS}	89	A12	90	A11	139	V _{SS}	140	DQ44	189	DQ58	190	V _{SS}
41	V _{SS}	42	V _{SS}	91	A9	92	A7	141	DQ40	142	DQ45	191	DQ59	192	DQ62
43	DQ16	44	DQ20	93	A8	94	A6	143	DQ41	144	V _{SS}	193	V _{SS}	194	DQ63
45	DQ17	46	DQ21	95	V _{DD}	96	V _{DD}	145	V _{SS}	146	$\overline{DQS5}$	195	SDA	196	V _{SS}
47	V _{SS}	48	V _{SS}	97	A5	98	A4	147	DM5	148	DQS5	197	SCL	198	SA0
49	$\overline{DQS2}$	50	NC	99	A3	100	A2	149	V _{SS}	150	V _{SS}	199	V _{DDSPD}	200	SA1

Note: 1. All pin assignments are consistent for all 8-byte unbuffered versions.


2. A13 is for 2GB modules only.

Input/Output Functional Description

Symbol	Type	Polarity	Function
CK0, CK1	(SSTL)	Positive Edge	The positive line of the differential pair of system clock inputs which drives the input to the on-DIMM PLL. All the DDR2 SDRAM address and control inputs are sampled on the rising edge of their associated clocks.
$\overline{\text{CK0}}, \overline{\text{CK1}}$	(SSTL)	Negative Edge	The negative line of the differential pair of system clock inputs which drives the input to the on-DIMM PLL.
CKE0, CKE1	(SSTL)	Active High	Activates the SDRAM CK signal when high and deactivates the CK signal when low. By deactivating the clocks, CKE low initiates the Power Down mode, or the Self Refresh mode.
$\overline{\text{CS0}}, \overline{\text{CS1}}$	(SSTL)	Active Low	Enables the associated SDRAM command decoder when low and disables the command decoder when high. When the command decoder is disabled, new commands are ignored but previous operations continue.
$\overline{\text{RAS}}, \overline{\text{CAS}}, \overline{\text{WE}}$	(SSTL)	Active Low	When sampled at the positive rising edge of the clock, $\overline{\text{RAS}}, \overline{\text{CAS}}, \overline{\text{WE}}$ define the operation to be executed by the SDRAM.
V_{REF}	Supply		Reference voltage for SSTL-18 inputs
ODT0, ODT1	Input	Active High	On-Die Termination control signals
BA0, BA1, BA2	(SSTL)	-	Selects which SDRAM bank is to be active.
A0 – A9 A10/AP A11, A12/A13	(SSTL)	-	During a Bank Activate command cycle, A0-A12/A13 define the row address (RA0-RA12/RA13) when sampled at the rising clock edge. A13 applies on 2GB SODIMM only. During a Read or Write command cycle, A0-A9 defines the column address (CA0-CA9) when sampled at the rising clock edge. In addition to the column address, AP is used to invoke Autoprecharge operation at the end of the Burst Read or Write cycle. If AP is high, autoprecharge is selected and BA0/BA1/BA2 define the bank to be precharged. If AP is low, autoprecharge is disabled. During a Precharge command cycle, AP is used in conjunction with BA0/BA1/BA2 to control which bank(s) to precharge. If AP is high all 8 banks will be precharged regardless of the state of BA0/BA1/BA2. If AP is low, then BA0/BA1/BA2 are used to define which bank to pre-charge.
DQ0 – DQ63	(SSTL)	Active High	Data and Check Bit Input/Output pins.
$V_{\text{DD}}, V_{\text{SS}}$	Supply		Power and ground for the DDR2 SDRAM input buffers and core logic
DQS0 – DQS7 $\overline{\text{DQS0}} - \overline{\text{DQS7}}$	(SSTL)	Negative and Positive Edge	Data strobe for input and output data
DM0 – DM7	Input	Active High	The data write masks, associated with one data byte. In Write mode, DM operates as a byte mask by allowing input data to be written if it is low but blocks the write operation if it is high. In Read mode, DM lines have no effect. DM8 is associated with check bits CB0-CB7, and is not used on x64 modules.
SA0 – SA1		-	Address inputs. Connected to either VDD or VSS on the system board to configure the Serial Presence Detect EEPROM address.
SDA		-	This bi-directional pin is used to transfer data into or out of the SPD EEPROM. A resistor must be connected from the SDA bus line to V_{DD} to act as a pull-up.
SCL		-	This signal is used to clock data into and out of the SPD EEPROM. A resistor may be connected from the SCL bus time to V_{DD} to act as a pull-up.
V_{DDSPD}	Supply		Serial EEPROM positive power supply.

Functional Block Diagram

[1GB – 2 Ranks, 64Mx16 DDR2 SDRAMs]

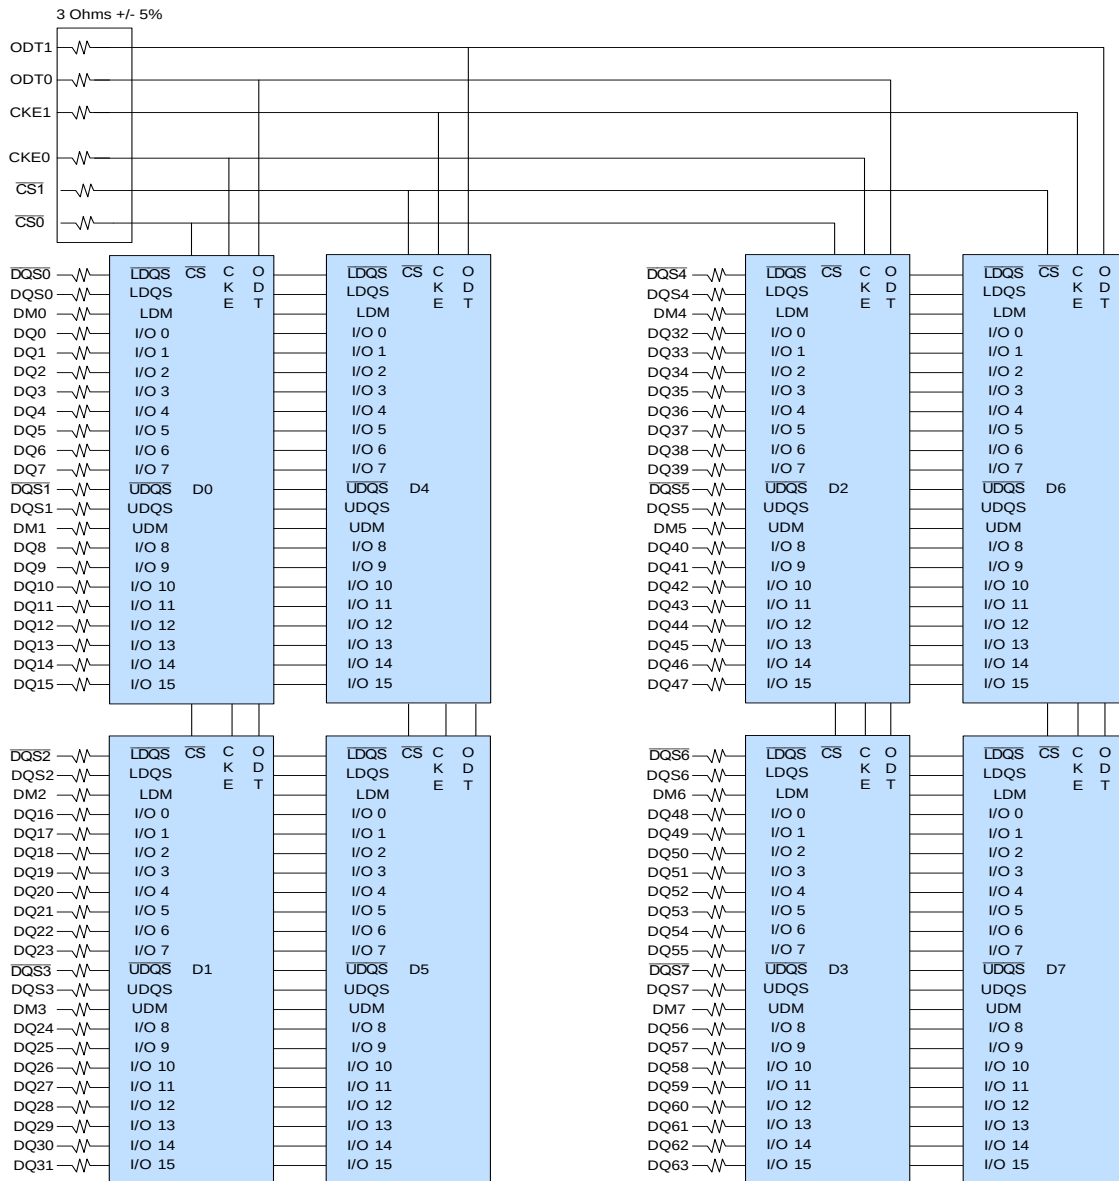


BA0-BA2 → SDRAMs D0-D7
A0-A12 → SDRAMs D0-D7
RAS → SDRAMs D0-D7
CAS → SDRAMs D0-D7
WE → SDRAMs D0-D7

V_{DDSPD} → SPD
 V_{DD} → D0-D7, VDD and VDDQ
 V_{REF} → D0-D7
 V_{SS} → D0-D7, SPD
 V_{DDID} →

CK0 → 4 loads
CK0 → 4 loads
CK1 → 4 loads
CK1 → 4 loads




Notes

1. DQ wiring may differ from that described in this drawing.
2. DQ/DQS/DM/CKE/S S relationships are maintained as shown.
3. DQ/DQS/DM/DQS resistors are 22 +/- 5% Ohms
4. V_{DDID} strap connections (for memory device V_{DD} , V_{DDQ}):
STRAP OUT (OPEN): $V_{DD} = V_{DDQ}$
STRAP IN (V_{SS}): V_{DD} is not equal to V_{DDQ}

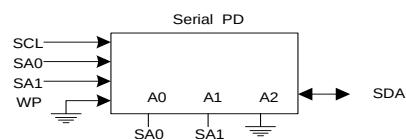


Functional Block Diagram

[2GB – 2 Ranks, 128M x8 DDR2 SDRAMs]

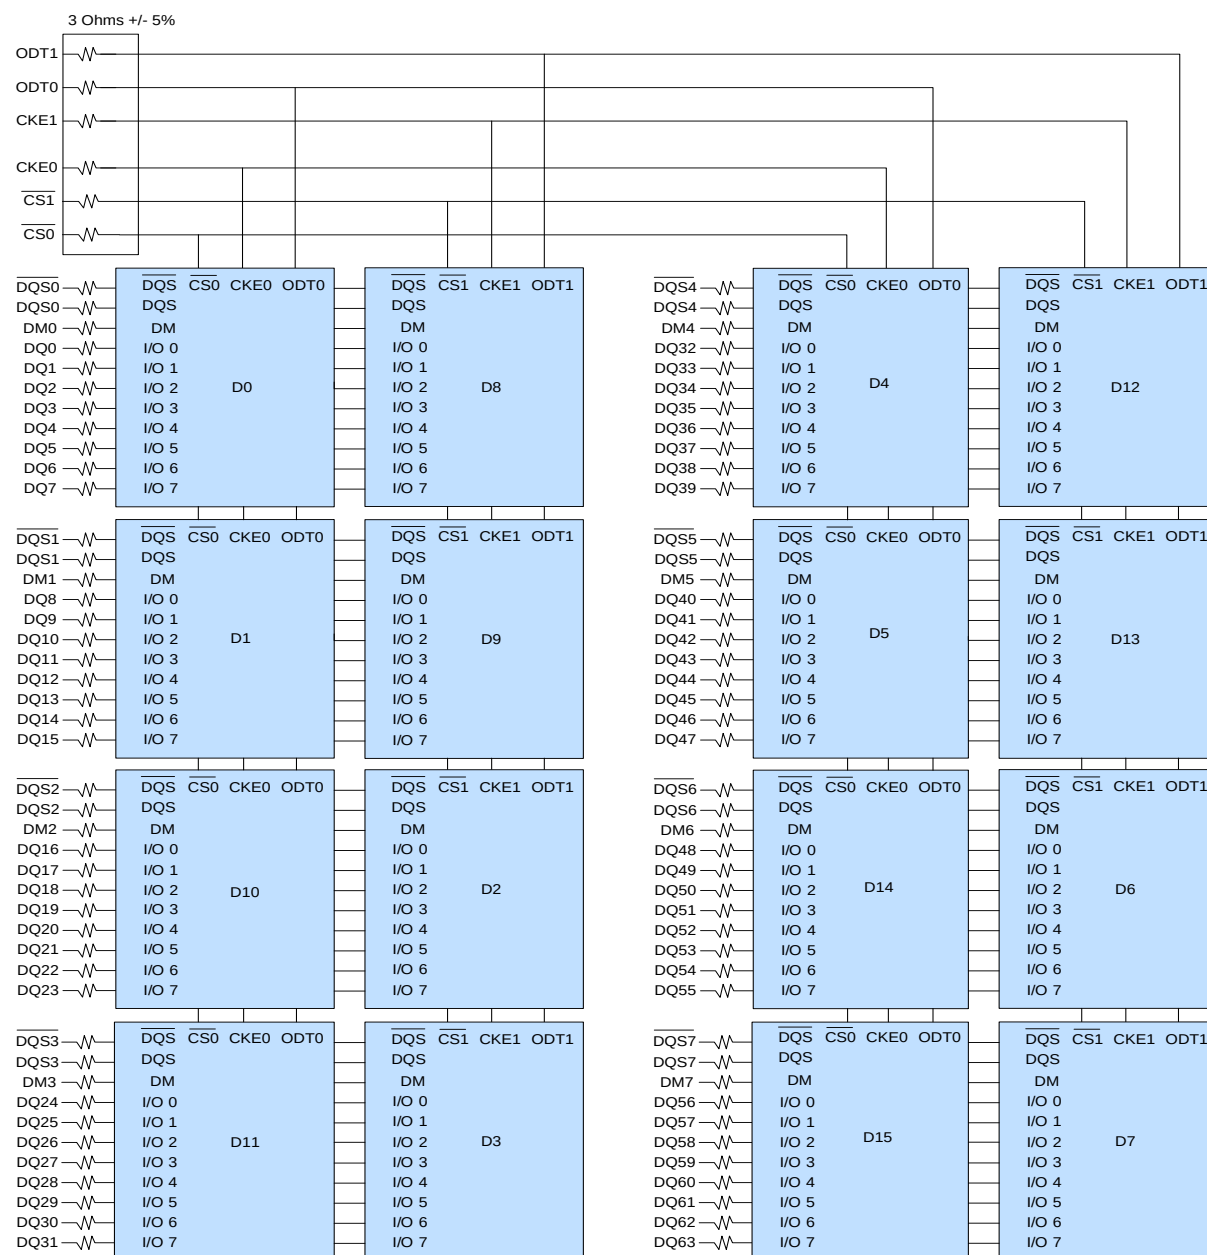


Serial PD
SDRAMS D0-D15, VDD and VDDQ
SDRAMS D0-D15
SDRAMS D0-D15 and SPD



Notes

Unless otherwise noted resistor values are 22 Ohms +/- 5%
DQ wiring may differ from that described in this drawing.
However, DQ/DM/DQS/DQS relationships are maintained as shown.

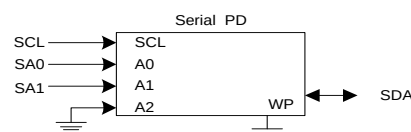

M2N1G64TUH8D4F / M2N2G64TU8HD4B / M2N1G64TUH8D5F / M2N2G64TU8HD5B

M2N1G64TUH8D6F / M2N2G64TU8HD6B

1GB: 128M x 64 / 2GB: 256M x 64

Unbuffered DDR2 SO-DIMM



Serial Presence Detect (1GB – 2 Ranks, 64Mx16 DDR2 SDRAMs) (Part 1 of 2)

Byte	Description	SPD Entry Value		Serial PD Data Entry (Hex.)		Note
		-3C	-AC	-3C	-AC	
0	Number of Serial PD Bytes Written during Production	128		80	80	
1	Total Number of Bytes in Serial PD device	256		08	08	
2	Fundamental Memory Type	DDR2 SDRAM		08	08	
3	Number of Row Addresses on Assembly	13		0D	0D	
4	Number of Column Addresses on Assembly	10		0A	0A	
5	Number of DIMM Ranks, Package, and Height	Module Height = 30.0mm, 2 ranks		61	61	
6	Data Width of Assembly	X64		40	40	
7	Reserved	Undefined		00	00	
8	Voltage Interface Level of this Assembly	SSTL 1.8V		05	05	
9	DDR2 SDRAM Device Cycle Time at CL=5	3ns	2.5ns	30	25	
10	DDR2 SDRAM Device Access Time (t_{AC}) from Clock at CL=5	0.45ns	0.4ns	45	40	
11	DIMM Configuration Type	Non Address/Command Parity, Non Data ECC, Non Data Parity,		00	00	
12	Refresh Rate/Type	7.8 μ s		82	82	
13	Primary DDR2 SDRAM Width	X16		10	10	
14	Error Checking DDR2 SDRAM Device Width	Undefined		00	00	
15	Reserved	Undefined		00	00	
16	DDR2 SDRAM Device Attributes: Burst Length Supported	4,8		0C	0C	
17	DDR2 SDRAM Device Attributes: Number of Device Banks	8		08	08	
18	DDR2 SDRAM Device Attributes: $\overline{CAS}$ Latencies Supported	3,4,5		38	38	
19	DIMM Mechanical Characteristics	$x \leq 3.80$ (mm)		01	01	
20	DDR2 SDRAM DIMM Type Information	SO-DIMM (67.6mm)		04	04	
21	DDR2 SDRAM Module Attributes	Analysis probe installed : No, FET Switch External Enable : No, Number of PLLs : 0, Number of Active Registers : 1,		00	00	
22	DDR2 SDRAM Device Attributes: General	Supports Weak Driver, Supports 50 ohm ODT, Supports PASR,		07	07	
23	Minimum Clock Cycle at CL=4	3.75ns		3D	3D	
24	Maximum Data Access Time from Clock at CL=4	0.5ns		50	50	
25	Minimum Clock Cycle Time at CL=3	5ns		50	50	
26	Maximum Data Access Time from Clock at CL=3	0.6ns		60	60	
27	Minimum Row Precharge Time (t_{RP})	15ns	12.5ns	3C	32	
28	Minimum Row Active to Row Active delay (t_{RRD})	10ns		28	28	
29	Minimum $\overline{RAS}$ to $\overline{CAS}$ delay (t_{RCD})	15ns	12.5ns	3C	32	
30	Minimum Active to Precharge Time (t_{RAS})	45ns		2D	2D	
31	Module Rank Density	512MB		80	80	
32	Address and Command Setup Time Before Clock (t_{IS})	0.2ns	0.17ns	20	17	
33	Address and Command Hold Time After Clock (t_{IH})	0.27ns	0.25ns	27	25	
34	Data Input Setup Time Before Clock (t_{DS})	0.1ns	0.05ns	10	05	
35	Data Input Hold Time After Clock (t_{DH})	0.17ns	0.12ns	17	12	
36	Write Recovery Time (t_{WR})	15ns		3C	3C	

M2N1G64TUH8D4F / M2N2G64TU8HD4B / M2N1G64TUH8D5F / M2N2G64TU8HD5B

M2N1G64TUH8D6F / M2N2G64TU8HD6B

1GB: 128M x 64 / 2GB: 256M x 64

Unbuffered DDR2 SO-DIMM



Serial Presence Detect (1GB – 2 Ranks, 64Mx16 DDR2 SDRAMs) (Part 2 of 2)

Byte	Description	SPD Entry Value		Serial PD Data Entry (Hex.)		Note
		-3C	-AC	-3C	-AC	
37	Internal Write to Read Command delay (t_{WTR})	7.5ns		1E	1E	
38	Internal Read to Precharge delay (t_{RTP})	7.5ns		1E	1E	
39	Reserved	Undefined		00	00	
40	Extension of Byte 41 t_{RC} and Byte 42 t_{RFC}	The number below a decimal point of t_{RC} and t_{RFC} are 0, t_{RFC} is less than 256ns.		06	36	
41	Minimum Core Cycle Time (t_{RC})	60ns	57.5ns	3C	39	
42	Min. Auto Refresh Command Cycle Time (t_{RFC})	127.5ns		7F	7F	
43	Maximum Clock Cycle Time (t_{CK})	8ns		80	80	
44	Max. DQS-DQ Skew Factor (t_{QHS})	0.24ns	0.2ns	18	14	
45	Read Data Hold Skew Factor (t_{QHS})	0.34ns	0.3ns	22	1E	
46-61	Reserved	Undefined		00	00	
62	SPD Reversion	1.3		13	13	
63	Checksum for Byte 0-62	Checksum Data		AA	90	
64-71	Manufacturer's JEDEC ID Code	Nanya		7F7F7F0B00000000		
72	Module Manufacturing Location	Manufacturing code		-		
73-91	Module Part number	Module Part Number in ASCII		-		1
92-255	Reserved	Undefined		-		

Note 1:

Module part number:

M2N1G64TUH8D4F-3C→4D324E31473634545548384434462D33432020

M2N1G64TUH8D4F-AC→4D324E31473634545548384434462D41432020

M2N1G64TUH8D5F-3C→4D324E31473634545548384435462D33432020

M2N1G64TUH8D5F-AC→4D324E31473634545548384435462D41432020

M2N1G64TUH8D6F-3C→4D324E31473634545548384436462D33432020

M2N1G64TUH8D6F-AC→4D324E31473634545548384436462D41432020

Byte	Description	SPD Entry Value		Serial PD Data Entry (Hex.)		Note
		-3C	-AC	-3C	-AC	
0	Number of Serial PD Bytes Written during Production	128		80	80	
1	Total Number of Bytes in Serial PD device	256		08	08	
2	Fundamental Memory Type	DDR2 SDRAM		08	08	
3	Number of Row Addresses on Assembly	14		0E	0E	
4	Number of Column Addresses on Assembly	10		0A	0A	
5	Number of DIMM Ranks, Package, and Height	Module Height = 30.0mm, 2 ranks		61	61	
6	Data Width of Assembly	X64		40	40	
7	Reserved	Undefined		00	00	
8	Voltage Interface Level of this Assembly	SSTL 1.8V		05	05	
9	DDR2 SDRAM Device Cycle Time at CL=5	3ns	2.5ns	30	25	
10	DDR2 SDRAM Device Access Time (t_{AC}) from Clock at CL=5	0.45ns	0.4ns	45	40	
11	DIMM Configuration Type	Non Address/Command Parity, Non Data ECC, Non Data Parity,		00	00	
12	Refresh Rate/Type	7.8 μ s		82	82	
13	Primary DDR2 SDRAM Width	X8		08	08	
14	Error Checking DDR2 SDRAM Device Width	Undefined		00	00	
15	Reserved	Undefined		00	00	
16	DDR2 SDRAM Device Attributes: Burst Length Supported	4,8		0C	0C	
17	DDR2 SDRAM Device Attributes: Number of Device Banks	8		08	08	
18	DDR2 SDRAM Device Attributes: $\overline{CAS}$ Latencies Supported	3,4,5		38	38	
19	DIMM Mechanical Characteristics	$x \leq 3.80$ (mm)		01	01	
20	DDR2 SDRAM DIMM Type Information	SO-DIMM (67.6mm)		04	04	
21	DDR2 SDRAM Module Attributes	Analysis probe installed : No, FET Switch External Enable : No, Number of PLLs : 0, Number of Active Registers : 1,		00	00	
22	DDR2 SDRAM Device Attributes: General	Supports Weak Driver, Supports 50 ohm ODT, Supports PASR,		07	07	
23	Minimum Clock Cycle at CL=4	3.75ns		3D	3D	
24	Maximum Data Access Time from Clock at CL=4	0.5ns		50	50	
25	Minimum Clock Cycle Time at CL=3	5ns		50	50	
26	Maximum Data Access Time from Clock at CL=3	0.6ns		60	60	
27	Minimum Row Precharge Time (t_{RP})	15ns	12.5ns	3C	32	
28	Minimum Row Active to Row Active delay (t_{RRD})	7.5ns		1E	1E	
29	Minimum $\overline{RAS}$ to $\overline{CAS}$ delay (t_{RCD})	15ns	12.5ns	3C	32	
30	Minimum Active to Precharge Time (t_{RAS})	45ns		2D	2D	
31	Module Rank Density	1GB		01	01	
32	Address and Command Setup Time Before Clock (t_{IS})	0.2ns	0.17ns	20	17	
33	Address and Command Hold Time After Clock (t_{IH})	0.27ns	0.25ns	27	25	
34	Data Input Setup Time Before Clock (t_{DS})	0.1ns	0.05ns	10	05	
35	Data Input Hold Time After Clock (t_{DH})	0.17ns	0.12ns	17	12	
36	Write Recovery Time (t_{WR})	15ns		3C	3C	

M2N1G64TUH8D4F / M2N2G64TU8HD4B / M2N1G64TUH8D5F / M2N2G64TU8HD5B

M2N1G64TUH8D6F / M2N2G64TU8HD6B

1GB: 128M x 64 / 2GB: 256M x 64

Unbuffered DDR2 SO-DIMM



Serial Presence Detect (2GB – 2 Ranks, 128 M x 8 DDR2 SDRAMs) (Part 2 of 2)

Byte	Description	SPD Entry Value		Serial PD Data Entry (Hex.)		Note
		-3C	-AC	-3C	-AC	
37	Internal Write to Read Command delay (t_{WTR})	7.5ns		1E	1E	
38	Internal Read to Precharge delay (t_{RTP})	7.5ns		1E	1E	
39	Reserved	Undefined		00	00	
40	Extension of Byte 41 t_{RC} and Byte 42 t_{RFC}	The number below a decimal point of t_{RC} and t_{RFC} are 0, t_{RFC} is less than 256ns.		06	36	
41	Minimum Core Cycle Time (t_{RC})	60ns	57.5ns	3C	39	
42	Min. Auto Refresh Command Cycle Time (t_{RFC})	127.5ns		7F	7F	
43	Maximum Clock Cycle Time (t_{CK})	8ns		80	80	
44	Max. DQS-DQ Skew Factor (t_{QHS})	0.24ns	0.2ns	18	14	
45	Read Data Hold Skew Factor (t_{QHS})	0.34ns	0.3ns	22	1E	
46-61	Reserved	Undefined		00	00	
62	SPD Reversion	1.3		13	13	
63	Checksum for Byte 0-62	Checksum Data		1A	00	
64-71	Manufacturer's JEDEC ID Code	Nanya		7F7F7F0B00000000		
72	Module Manufacturing Location	Manufacturing code		-		
73-91	Module Part number	Module Part Number in ASCII		-		1
92-255	Reserved	Undefined		-		

Note 1:

Module part number:

M2N2G64TU8HD4B-3C → 4D324E32473634545538484434422D33432020

M2N2G64TU8HD4B-AC → 4D324E32473634545538484434422D41432020

M2N2G64TU8HD5B-3C → 4D324E32473634545538484435422D33432020

M2N2G64TU8HD5B-AC → 4D324E32473634545538484435422D41432020

M2N2G64TU8HD6B-3C → 4D324E32473634545538484436422D33432020

M2N2G64TU8HD6B-AC → 4D324E32473634545538484436422D41432020

Environmental Requirements

Symbol	Parameter	Rating	Units
T _{OPR}	Operating Temperature (ambient)	0 to 65	°C
H _{OPR}	Operating Humidity (relative)	10 to 90	%
T _{STG}	Storage Temperature	-50 to 100	°C
H _{STG}	Storage Humidity (without condensation)	5 to 95	%
	Barometric pressure (operating & storage) up to 9850ft.	105 to 69	kPa

Note: Stress greater than those listed may cause permanent damage to the device. This is a stress rating only and device functional operation at or above the conditions indicated is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Absolute Maximum DC Ratings

Symbol	Parameter	Rating	Units
V _{DD}	Voltage on VDD pins relative to Vss	-1.0 to +2.3	V
V _{DDQ}	Voltage on VDDQ pins relative to Vss	-0.5 to +2.3	V
V _{DDL}	Voltage on VDDL pins relative to Vss	-0.5 to +2.3	V
V _{IN} , V _{OUT}	Voltage on I/O pins relative to Vss	-0.5 to +2.3	V
T _{STG}	Storage Temperature (Plastic)	-55 to +100	°C

Note: Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is stress rating only, and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Storage temperature is the case surface temperature on the center/top side of the DRAM.

Operating temperature Conditions

Symbol	Parameter	Rating	Units	Note
T _{CASE}	Operating Temperature (Ambient)	0 to 95	°C	1

Note:

- Case temperature is measured at top and center side of any DRAMs.
- $t_{CASE} > 85^{\circ}\text{C} \rightarrow t_{REFI} = 3.9 \mu\text{s}$

DC Electrical Characteristics and Operating Conditions

Symbol	Parameter	Min	Max	Units	Notes
V _{DD}	Supply Voltage	1.7	1.9	V	1
V _{DDL}	DLL Supply Voltage	1.7	1.9	V	1
V _{DDQ}	Output Supply Voltage	1.7	1.9	V	1
V _{SS} , V _{SSQ}	Supply Voltage, I/O Supply Voltage	0	0	V	
V _{REF}	Input Reference Voltage	0.49V _{DDQ}	0.51V _{DDQ}	V	1, 2
V _{TT}	Termination Voltage	V _{REF} – 0.04	V _{REF} + 0.04	V	3

Note:

- There is no specific device VDD supply voltage requirement for SSTL_18 compliance. However, VDDQ must be less than or equal to VDD under all conditions.
- VREF is expected to be equal to 0.5 V_{DDQ} of the transmitting device, and to track variations in the DC level of the same. Peak-to-peak noise on VREF may not exceed 2% of the DC value.
- VTT of transmitting device must track VREF of receiving device.

ODT DC Electrical Characteristics

Parameter/Condition	Symbol	Min.	Nom.	Max.	Units	Note
Rtt effective impedance value for EMRS(A6,A2)=0,1; 75ohm	Rtt1(eff)	60	75	90	ohm	1
Rtt effective impedance value for EMRS(A6,A2)=1,0; 150ohm	Rtt2(eff)	120	150	180	ohm	1
Rtt effective impedance value for EMRS(A6,A2)=1,1; 50ohm	Rtt3(eff)	40	50	60	ohm	1
Deviation of V_M with respect to $V_{DDQ}/2$	Delta VM	-6		+6	%	1
Note1: Test condition for Rtt measurements.						

Input AC/DC logic level

Symbol	Parameter	PC2-5300		PC2-6400		Units
		Min.	Max.	Min.	Max.	
V_{IH} (AC)	Input High (Logic1) Voltage	$V_{REF} + 0.200$	-	$V_{REF} + 0.200$	-	V
V_{IL} (AC)	Input Low (Logic0) Voltage	-	$V_{REF} - 0.200$	-	$V_{REF} - 0.200$	V
V_{IH} (DC)	Input High (Logic1) Voltage	$V_{REF} + 0.125$	$V_{DDQ} + 0.3$	$V_{REF} + 0.125$	$V_{DDQ} + 0.3$	V
V_{IL} (DC)	Input Low (Logic0) Voltage	-0.3	$V_{REF} - 0.125$	-0.3	$V_{REF} - 0.125$	V

Operating, Standby, and Refresh Currents

$T_{CASE} = 0\text{ }^{\circ}\text{C} \sim 85\text{ }^{\circ}\text{C}$; $V_{DDQ} = V_{DD} = 1.8\text{V} \pm 0.1\text{V}$ [1GB, 2 Ranks, 64Mx16 DDR2 SDRAMs]

Symbol	Parameter/Condition	PC2-5300 (-3C)	PC2-6400 (-AC)	Unit
IDD0	Operating Current: one bank; active/precharge; $t_{RC} = t_{RC(MIN)}$; $t_{CK} = t_{CK(MIN)}$; DQ, DM, and DQS inputs changing twice per clock cycle; address and control inputs changing once per clock cycle	693	782	mA
IDD1	Operating Current: one bank; active/read/precharge; Burst = 4; $t_{RC} = t_{RC(MIN)}$; $CL = 4$; $t_{CK} = t_{CK(MIN)}$; $I_{OUT} = 0\text{mA}$; address and control inputs changing once per clock cycle	796	900	mA
IDD2P	Precharge Power-Down Standby Current: all banks idle; power-down mode; $CKE \leq V_{IL(MAX)}$; $t_{CK} = t_{CK(MIN)}$	88	88	mA
IDD2Q	Precharge quiet standby current	379	412	mA
IDD2N	Idle Standby Current: $CS \geq V_{IH(MIN)}$; all banks idle; $CKE \geq V_{IH(MIN)}$; $t_{CK} = t_{CK(MIN)}$; address and control inputs changing once per clock cycle	549	620	mA
IDD3PF	Active Power-Down Standby Current: one bank active; power-down mode; $CKE \leq V_{IL(MAX)}$; $t_{CK} = t_{CK(MIN)}$; $MRS(12)=0$	250	265	mA
IDD3PS	Active Power-Down Standby Current: one bank active; power-down mode; $CKE \leq V_{IL(MAX)}$; $t_{CK} = t_{CK(MIN)}$; $MRS(12)=1$	106	106	mA
IDD3N	Active Standby Current: one bank; active/precharge; $CS \geq V_{IH(MIN)}$; $CKE \geq V_{IH(MIN)}$; $t_{RC} = t_{RAS(MAX)}$; $t_{CK} = t_{CK(MIN)}$; DQ, DM, and DQS inputs changing twice per clock cycle; address and control inputs changing once per clock cycle	510	561	mA
IDD4R	Operating Current: one bank; Burst = 4; reads; continuous burst; address and control inputs changing once per clock cycle; DQ and DQS outputs changing twice per clock cycle; $CL = 4$; $t_{CK} = t_{CK(MIN)}$; $I_{OUT} = 0\text{mA}$	928	1032	mA
IDD4W	Operating Current: one bank; Burst = 4; writes; continuous burst; address and control inputs changing once per clock cycle; DQ and DQS inputs changing twice per clock cycle; $CL = 4$; $t_{CK} = t_{CK(MIN)}$	804	886	mA
IDD5B	Burst Refresh Current: $t_{RC} = t_{RFC(MIN)}$	1223	1270	mA
IDD6	Self-Refresh Current: $CKE \leq 0.2\text{V}$	97	97	mA
IDD7	Operating Current: four bank; four bank interleaving with $BL = 4$, address and control inputs randomly changing; 50% of data changing at every transfer; $t_{RC} = t_{RC(min)}$; $I_{OUT} = 0\text{mA}$.	1751	1952	mA

Note: Module IDD was calculated from component IDD. It may differ from the actual measurement.

Operating, Standby, and Refresh Currents

T_{CASE} = 0 °C ~ 85 °C; V_{DDQ} = V_{DD} = 1.8V ± 0.1V [2GB, 2 Ranks, 128M x 8 DDR2 SDRAMs]

Symbol	Parameter/Condition	PC2-5300 (-3C)	PC2-6400 (-AC)	Unit
IDD0	Operating Current: one bank; active/precharge; $t_{RC} = t_{RC(MIN)}$; $t_{CK} = t_{CK(MIN)}$; DQ, DM, and DQS inputs changing twice per clock cycle; address and control inputs changing once per clock cycle	1379	1556	mA
IDD1	Operating Current: one bank; active/read/precharge; Burst = 4; $t_{RC} = t_{RC(MIN)}$; CL = 4; $t_{CK} = t_{CK(MIN)}$; I _{OUT} = 0mA; address and control inputs changing once per clock cycle	1293	1447	mA
IDD2P	Precharge Power-Down Standby Current: all banks idle; power-down mode; $CKE \leq V_{IL(MAX)}$; $t_{CK} = t_{CK(MIN)}$	176	176	mA
IDD2Q	Precharge quiet standby current	771	840	mA
IDD2N	Idle Standby Current: $CS \geq V_{IH(MIN)}$; all banks idle; $CKE \geq V_{IH(MIN)}$; $t_{CK} = t_{CK(MIN)}$; address and control inputs changing once per clock cycle	1115	1252	mA
IDD3PF	Active Power-Down Standby Current: one bank active; power-down mode; $CKE \leq V_{IL(MAX)}$; $t_{CK} = t_{CK(MIN)}$; MRS(12)=0	524	553	mA
IDD3PS	Active Power-Down Standby Current: one bank active; power-down mode; $CKE \leq V_{IL(MAX)}$; $t_{CK} = t_{CK(MIN)}$; MRS(12)=1	231	234	mA
IDD3N	Active Standby Current: one bank; active/precharge; $CS \geq V_{IH(MIN)}$; $CKE \geq V_{IH(MIN)}$; $t_{RC} = t_{RAS(MAX)}$; $t_{CK} = t_{CK(MIN)}$; DQ, DM, and DQS inputs changing twice per clock cycle; address and control inputs changing once per clock cycle	989	1086	mA
IDD4R	Operating Current: one bank; Burst = 4; reads; continuous burst; address and control inputs changing once per clock cycle; DQ and DQS outputs changing twice per clock cycle; CL = 4; $t_{CK} = t_{CK(MIN)}$; I _{OUT} = 0mA	1572	1740	mA
IDD4W	Operating Current: one bank; Burst = 4; writes; continuous burst; address and control inputs changing once per clock cycle; DQ and DQS inputs changing twice per clock cycle; CL = 4; $t_{CK} = t_{CK(MIN)}$	1417	1556	mA
IDD5B	Burst Refresh Current: $t_{RC} = t_{RFC(MIN)}$	2431	2523	mA
IDD6	Self-Refresh Current: $CKE \leq 0.2V$	194	194	mA
IDD7	Operating Current: four bank; four bank interleaving with BL = 4, address and control inputs randomly changing; 50% of data changing at every transfer; $t_{RC} = t_{RC(min)}$; I _{OUT} = 0mA.	2593	2991	mA

Note: Module IDD was calculated from component IDD. It may differ from the actual measurement.

AC Timing Specifications for DDR2 SDRAM Devices Used on Module

(T_{CASE} = 0 °C ~ 85 °C; V_{DDQ} = 1.8V ± 0.1V; V_{DD} = 1.8V ± 0.1V, See AC Characteristics) (Part 1 of 2)

Symbol	Parameter	-3C		-AC		Unit	Notes
		Min.	Max.	Min.	Max.		
t _{AC}	DQ output access time from CK/ $\overline{\text{CK}}$	-0.48	+0.52	-0.40	+0.40	ns	
t _{DQSCK}	DQS output access time from CK/ $\overline{\text{CK}}$	-0.4	+0.4	-0.35	+0.35	ns	
t _{CH}	CK high-level width	0.48	0.52	0.48	0.52	t _{CK}	
t _{CL}	CK low-level width	0.48	0.52	0.48	0.52	t _{CK}	
t _{HP}	Minimum half clk period for any given cycle; defined by clk high (t _{CH}) or clk low (t _{CL}) time	t _{CH} or t _{CL}	-	t _{CH} or t _{CL}	-	t _{CK}	
t _{CK}	Clock Cycle Time	3	8	2.5	8	ns	
t _{DH}	DQ and DM input hold time	175	-	125	-	ps	
t _{DS}	DQ and DM input setup time	100	-	50	-	ps	
t _{IPW}	Input pulse width	0.6	-	0.6	-	t _{CK}	
t _{DIPW}	DQ and DM input pulse width (each input)	0.35	-	0.35	-	t _{CK}	
t _{HZ}	Data-out high-impedance time from CK/ $\overline{\text{CK}}$	-	t _{AC max}	-	t _{AC max}	ns	
t _{LZ(DQ)}	Data-out low-impedance time from CK/ $\overline{\text{CK}}$	2t _{AC min}	t _{AC max}	2t _{AC min}	t _{AC max}	ns	
t _{LZ(DQS)}	DQS low-impedance time from CK/ $\overline{\text{CK}}$	t _{AC min}	t _{AC max}	t _{AC min}	t _{AC max}	ns	
t _{DQSQ}	DQS-DQ skew (DQS & associated DQ signals)	-	0.24	-	0.20	ns	
t _{QHS}	Data hold Skew Factor	-	0.34	-	0.30	ns	
t _{QH}	Data output hold time from DQS	t _{HP} - t _{QHS}	-	t _{HP} - t _{QHS}	-	ns	
t _{DQSS}	Write command to 1 st DQS latching transition	-0.25	0.25	-0.25	0.25	t _{CK}	
t _{DQSH}	DQS input high pulse width	0.35	-	0.35	-	t _{CK}	
t _{DQSL}	DQS input low pulse width	0.35	-	0.35	-	t _{CK}	
t _{DSS}	DQS falling edge to CK setup time (write cycle)	0.2	-	0.2	-	t _{CK}	
t _{DSH}	DQS falling edge hold time from CK (write cycle)	0.2	-	0.2	-	t _{CK}	
t _{MRD}	Mode register set command cycle time	2	-	2	-	t _{CK}	
t _{WPST}	Write postamble	0.40	0.60	0.40	0.60	t _{CK}	
t _{WPRE}	Write preamble	0.35	-	0.35	-	t _{CK}	
t _{IH}	Address and control input hold time	0.275	-	0.250	-	ns	
t _{IS}	Address and control input setup time	0.2	-	0.175	-	ns	
t _{RPRE}	Read preamble	0.9	1.1	0.9	1.1	t _{CK}	
t _{RPST}	Read postamble	0.4	0.6	0.4	0.6	t _{CK}	
t _{Delay}	Minimum time clocks remains ON after CKE asynchronously drops Low	t _{IS} + t _{CK} + t _{IH}	-	t _{IS} + t _{CK} + t _{IH}	-	ns	
t _{RFC}	Refresh to active/Refresh command time	105		105		ns	
t _{REFI}	Average Periodic Refresh Interval (85°C < T _{CASE} ≤ 95°C)	3.9		3.9		μs	
	Average Periodic Refresh Interval (0°C ≤ T _{CASE} ≤ 85°C)	7.8		7.8		μs	

AC Timing Specifications for DDR2 SDRAM Devices Used on Module


(T_{CASE} = 0 °C ~ 85 °C; V_{DDQ} = 1.8V ± 0.1V; V_{DD} = 1.8V ± 0.1V, See AC Characteristics) (Part 2 of 2)

Symbol	Parameter	-3C		-AC		Unit	Notes
		Min.	Max.	Min.	Max.		
t _{RRD}	Active bank A to Active bank B command	7.5	-	7.5	-	ns	
t _{CCD}	$\overline{\text{CAS}}$ to $\overline{\text{CAS}}$	2	-	2	-	t _{CK}	
t _{WR}	Write recovery time	15	-	15	-	ns	
WR	Write recovery time with Auto-Precharge	t _{WR} /t _{CK}		t _{WR} /t _{CK}		ns	
t _{DAL}	Auto precharge write recovery + precharge time	WR + t _{RP}	-	WR + t _{RP}	-	t _{CK}	
t _{WTR}	Internal write to read command delay	7.5	-	7.5	-	ns	
t _{RTP}	Internal read to precharge command delay	7.5	-	7.5	-	ns	
t _{XSNR}	Exit self refresh to a Non-read command	t _{RFC} + 10	-	t _{RFC} + 10	-	ns	
t _{XSRD}	Exit self refresh to a Read command	200	-	200	-	t _{CK}	
t _{XP}	Exit precharge power down to any Non-read command	2	-	2	-	t _{CK}	
t _{XARD}	Exit active power down to read command	2	-	2	-	t _{CK}	
t _{XARDS}	Exit active power down to read command	7-AL	-	8-AL	-	t _{CK}	
t _{CKE}	CKE minimum pulse width	3	-	3	-	t _{CK}	
t _{OIT}	OCD drive mode output delay	0	12	0	12	ns	
ODT							
t _{AOND}	ODT turn-on delay	2	2	2	2	t _{CK}	
t _{AON}	ODT turn-on	t _{AC(min)}	t _{AC(max)} + 0.7	t _{AC(min)}	t _{AC(max)} + 0.7	ns	
t _{AONPD}	ODT turn-on (Power down mode)	t _{AC(min)} + 2	2t _{CK} + t _{AC(max)} + 1	t _{AC(min)} + 2	2t _{CK} + t _{AC(max)} + 1	ns	
t _{AOFD}	ODT turn-off delay	2.5	2.5	2.5	2.5	t _{CK}	
t _{AOF}	ODT turn-off	t _{AC(min)}	t _{AC(max)} + 0.6	t _{AC(min)}	t _{AC(max)} + 0.6	ns	
t _{AOFPD}	ODT turn-off (Power down mode)	t _{AC(min)} + 2	2.5t _{CK} + t _{AC(max)} + 1	t _{AC(min)} + 2	2.5t _{CK} + t _{AC(max)} + 1	ns	
t _{ANPD}	ODT to power down entry latency	3	-	3	-	t _{CK}	
t _{AXPD}	ODT power down exit latency	8	-	8	-	t _{CK}	

Speed Grade Definition						
Symbol	Parameter	-3C		-AC		Unit
		Min.	Max.	Min.	Max.	
t _{RAS}	Row Active Time	45	70000	45	70000	ns
t _{RCD}	RAS to CAS delay	15	-	12.5	-	ns
t _{RC}	Row Cycle Time	60	-	57.5	-	ns
t _{RP}	Row Precharge Time	15	-	12.5	-	ns

Package Dimensions

[1GB – 2 Ranks, 64Mx16 DDR2 SDRAMs]

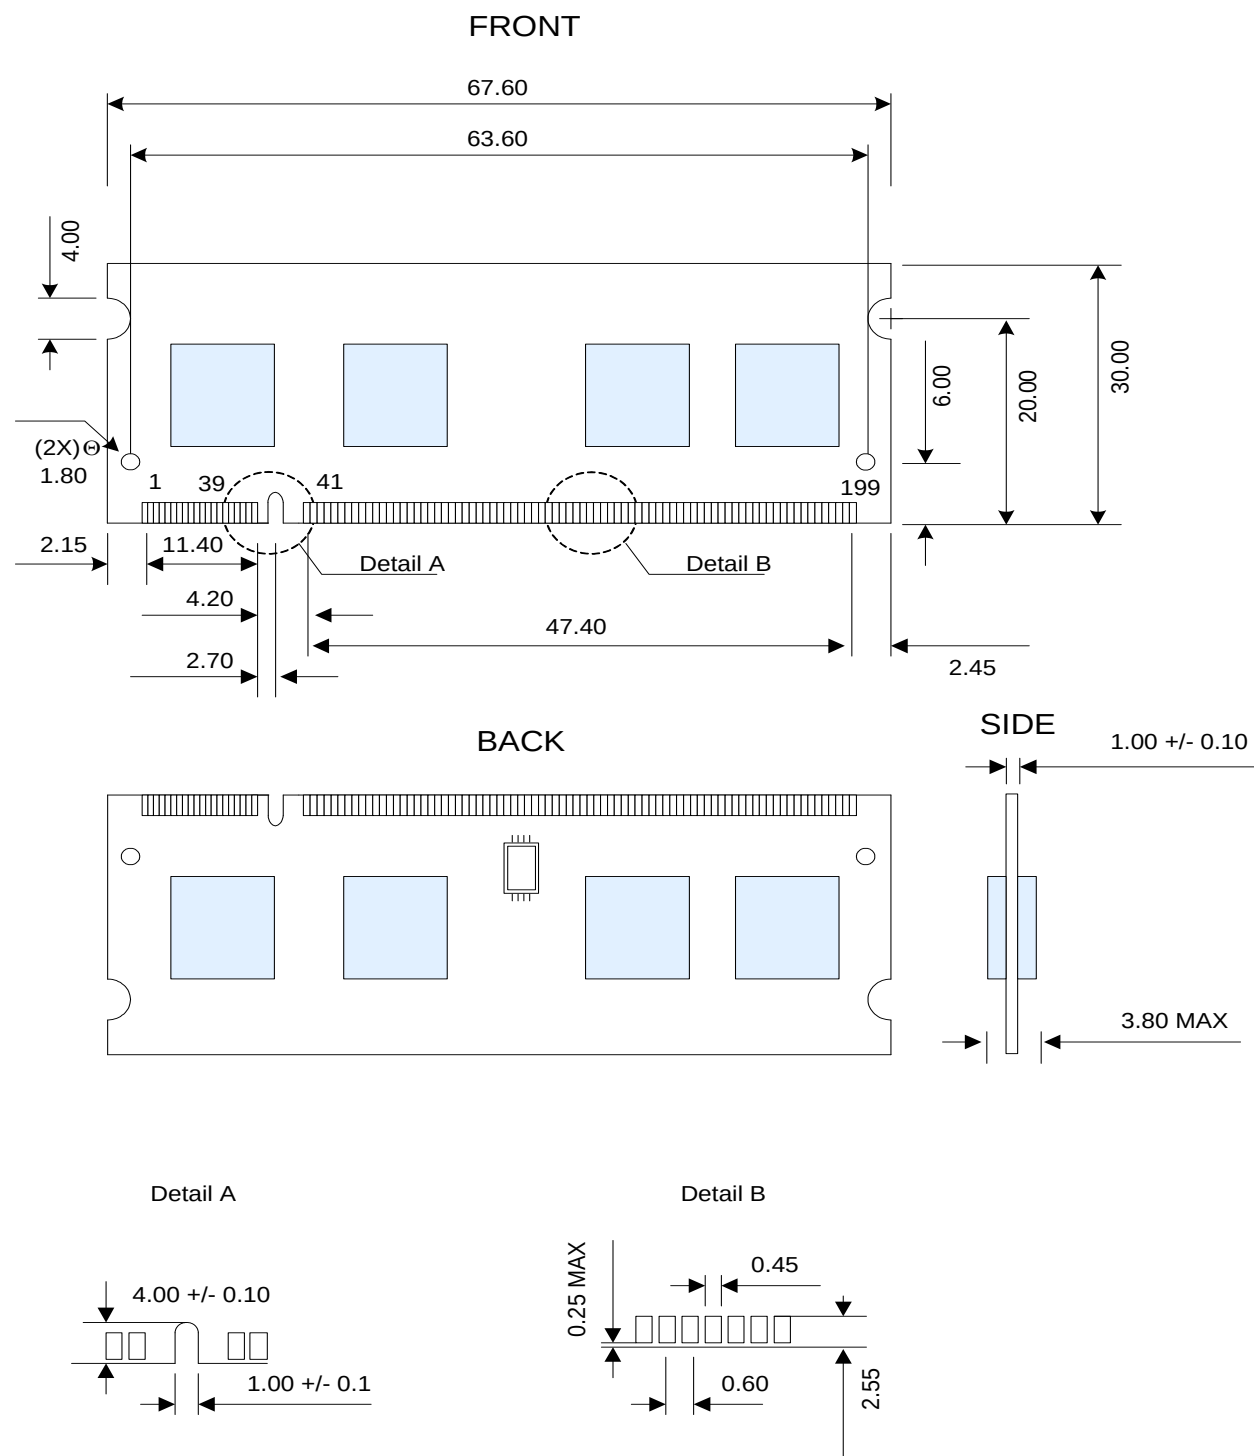


Note: All dimensions are typical with tolerances of +/- 0.15 unless otherwise stated.
Units: Millimeters (Inches)

Note: Device position and scale are only for reference.

Package Dimensions

[2GB – 2 Ranks, 128M x8 DDR2 SDRAMs]

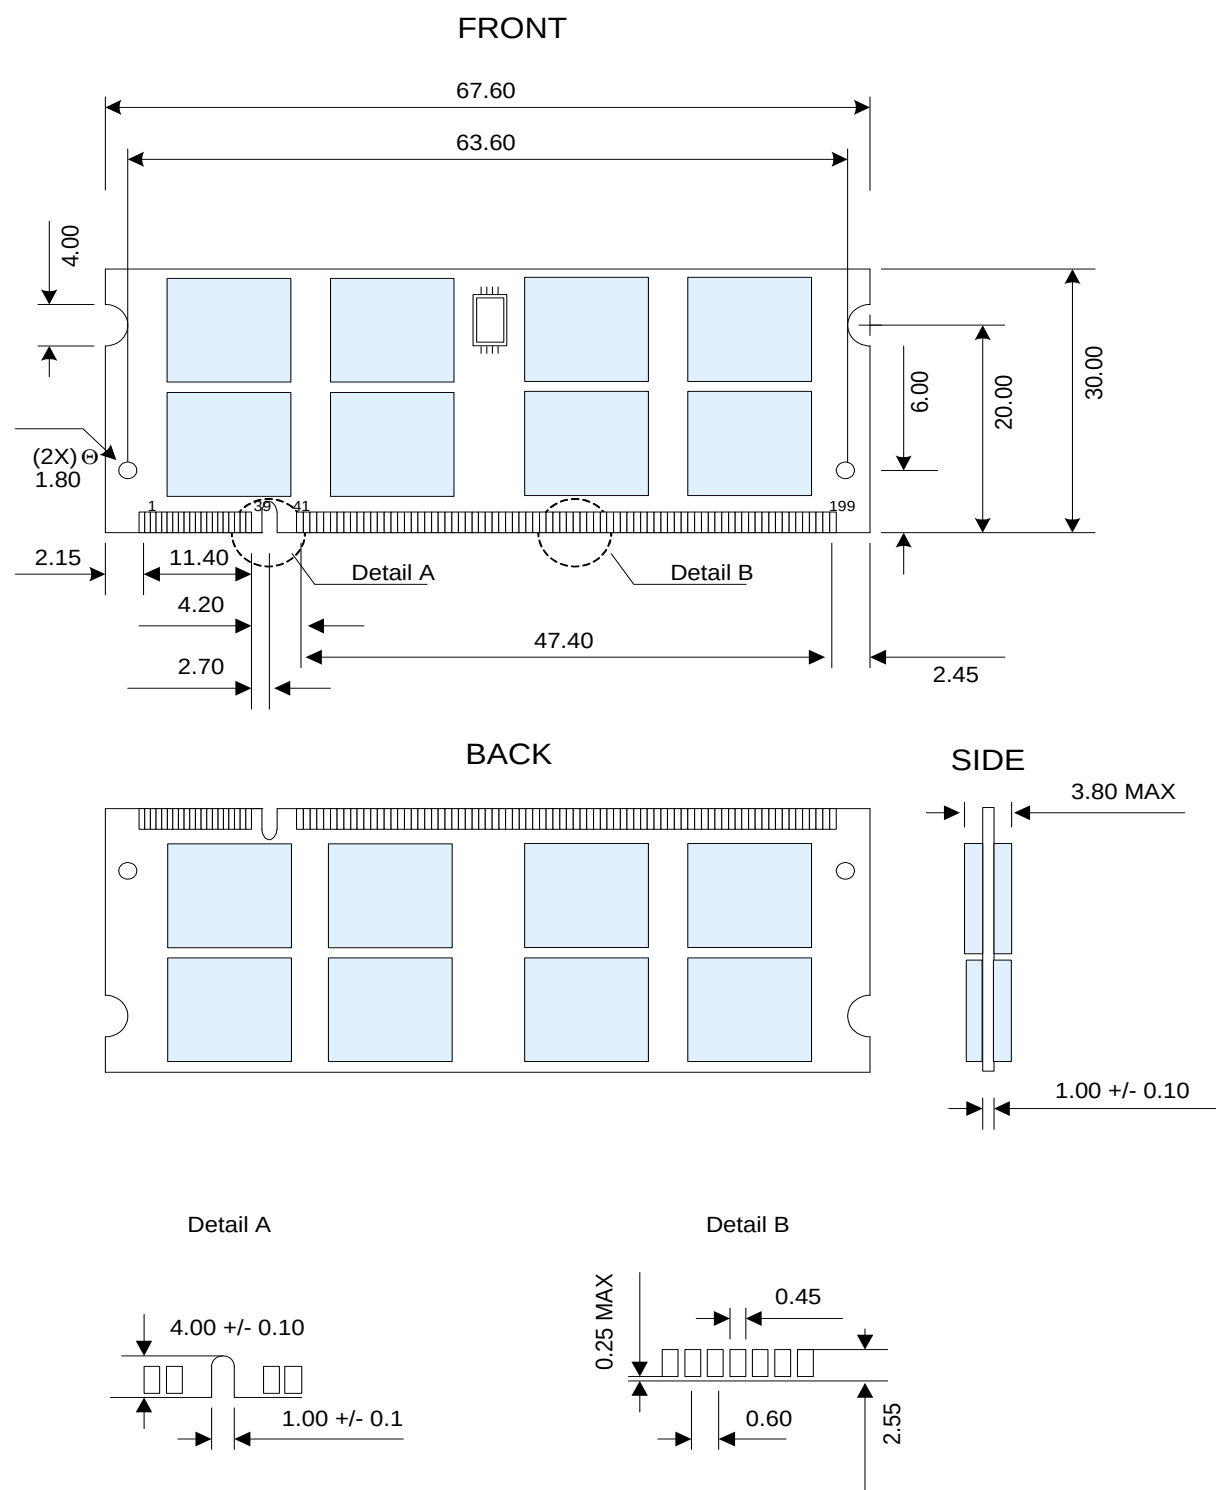

Note: All dimensions are typical with tolerances of +/- 0.15 unless otherwise stated.
Units: Millimeters (Inches)

Note: Device position and scale are only for reference.

M2N1G64TUH8D4F / M2N2G64TU8HD4B / M2N1G64TUH8D5F / M2N2G64TU8HD5B
M2N1G64TUH8D6F / M2N2G64TU8HD6B
1GB: 128M x 64 / 2GB: 256M x 64
Unbuffered DDR2 SO-DIMM



Revision Log

Rev	Date	Modification
1.0	03/2008	Official Release
1.1	07/2008	Revision update

Nanya Technology Corporation

Hwa Ya Technology Park 669

Fu Hsing 3rd Rd., Kueishan,

Taoyuan, 333, Taiwan, R.O.C.

Tel: +886-3-328-1688

Please visit our home page for more information: www.nanya.com

Printed in Taiwan

©2008